
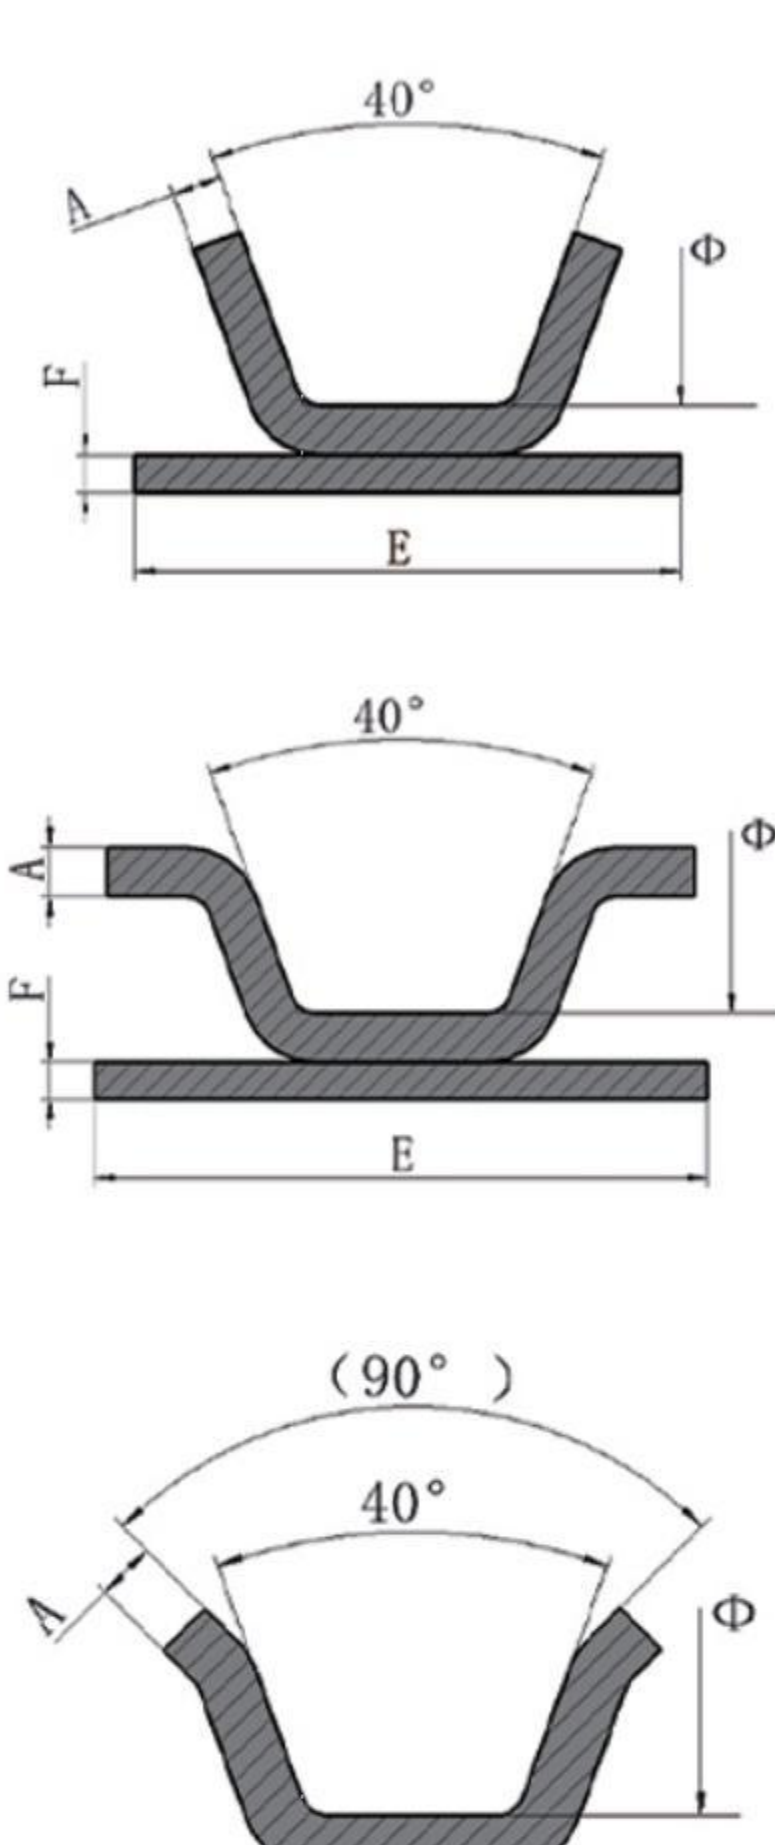


沟槽 V-band super clamp

槽型 shape of the V parts	法兰直径(φ) mm Diameter	卡箍外圆 outside clamp			V型槽 V-band		配件 Components		适用 产品类型 Application type	适用环境 Application Environment	
		外圈宽度(E)	外圈厚度(F)	材质 Material	V型槽厚度(A)	材质 Material	螺钉 Screw	螺母 Nut			
		bandwidth mm	thickness mm		width mm						
	60≤φ≤80	19/22	1.0/1.2	300ss	1.2/1.5	400ss 300ss	400ss 300ss	400ss 300ss	I 类 II 类 III类IV类 V 类VI类	≤650℃ (600-1200℃ 解决方案请与 凯诺技术工程 师沟通) If the temperperure requirement between 600-1200℃, please contact us, our engineer will provide you the solution.	
	80<φ≤100	19/22/25/30	1.0/1.2/1.5								
	100<φ≤150		1.2/1.5/2.0		1.2/1.5/2.0				I 类 II 类 III类		
	150<φ≤300	22/25/30	1.5/2.0/2.5		2.0/2.5						
	φ>300	25/30	2.0/2.5		2.5/3.0						

产品类型	整体式 (I 类)	快装式 (II 类)	快装式 (III 类)
常规V型槽类			
产品类型	连接片式(IV类)	一体式 (V 类)	蜗轮蜗杆式 (VI 类)
其他V型槽类			

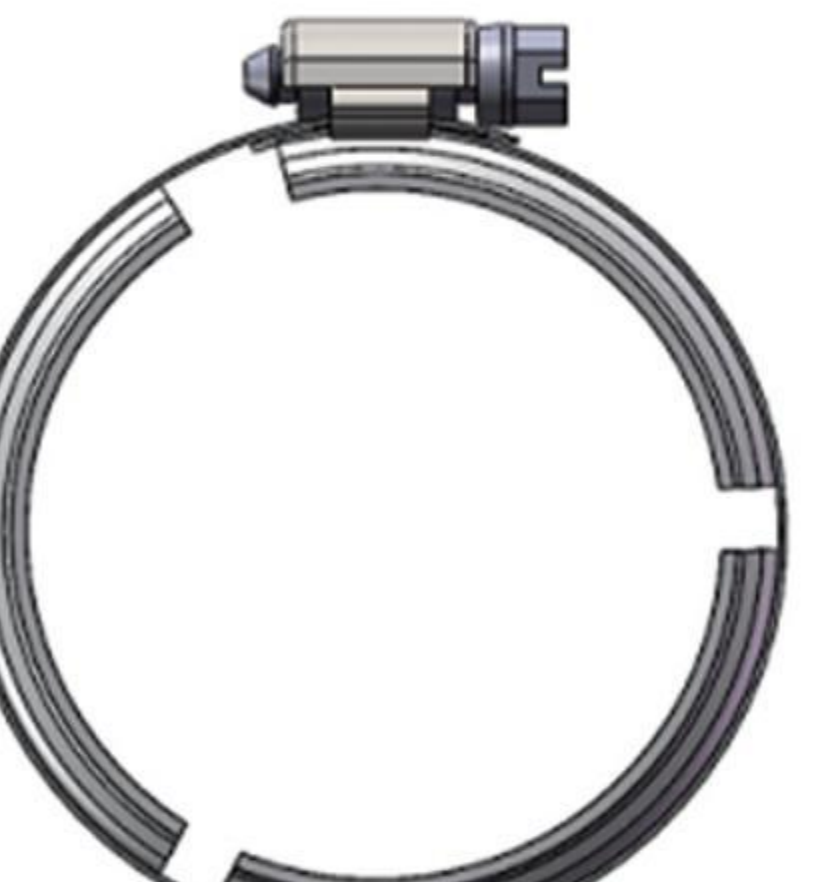

根据客人要求，其他规格和材质也能够提供。
According to the requirement of customers, other sizes and material are also available.
以上信息仅供参考，不作为技术规范：
All the information is just for your reference, can't be used as specification

强力类卡箍